

**Serie | 4, Built-under cooker hood, 60 cm, Stainless steel  
DUL63CC50B**



**Conventional cooker hoods are mounted under cabinets and always visible, allowing you to keep your storage space.**

- An impressive extraction rate of 350 m<sup>3</sup>/h ensures this hood will have your kitchen odour free in no time.
- LED lighting is highly energy efficient and provides attractive, white and even lighting for the hob area.



**Technical Data**

Typology :	Traditional
Approval certificates :	CE
Length of electrical supply cord (cm) :	145
Minimum distance above an electric hob :	650
Minimum distance above a gas hob :	650
Net weight (kg) :	5.226
Type of control :	mechanical
Number of speed settings :	3
Maximum output air extraction (m <sup>3</sup> /h) :	350
Maximum output recirculating air (m <sup>3</sup> /h) :	110
Number of lights (Stck) :	2
Noise level (dB(A) re 1 pW) :	72
Diameter of air outlet (mm) :	120 / 100
Grease filter material :	Washable aluminium
EAN code :	4242002968513
Connection rating (W) :	146
Voltage (V) :	220-240
Frequency (Hz) :	50
Plug type :	GB plug
Installation type :	Built-under

**Optional accessories**

DHZ2701 : Active carbon filter



4 242002 968513

**Serie | 4, Built-under cooker hood, 60 cm,  
Stainless steel  
DUL63CC50B**

**Optional accessories**

- Recirculating kit
- \* In accordance with the EU-Regulation No 65/2014

**Conventional cooker hoods are mounted under cabinets and always visible, allowing you to keep your storage space.**

**Key performance features:**

- Energy Efficiency Class: D (at a range of energy efficiency classes from A++ to E)\*
- Maximum extraction 350 m<sup>3</sup>/h
- Noise max. Normal Level: 72 dB\*

**Features**

- Push button control for extractor speeds and light
- 3 power levels
- 2 x 4W LED light
- Colour Temperature: 3000 K
- 2 removable metal grease filter cassettes
- Adjustable glass visor
- Designed for wall mounted installation or suspended beneath a reduced height wall cupboard


**Design**

- Brushed steel
- Built under conventional hood
- Push button control
- Mechanical


**Performance/technical information**

- Suitable for ducted or recirculating operation
- For recirculated extraction charcoal filter (accessory) needed
- Maximum extraction 350 m<sup>3</sup>/h
- Noise level according to EN 60704-3 and EN 60704-2-13 at maximum normal setting: extraction rate: 72 dB (A) re 1pW
- Noise max. Normal Level: 72 dB\*
- Power rating: 146 W
- Light Intensity: 45 lux
- Colour Temperature: 3000 K
- Electrical cable length 1.45 m
- Diameter pipe Ø 120 mm (Ø 100 mm enclosed)
- Dimensions exhaust air (HxWxD): 150-150 x 600 x 482 mm
- Dimensions recirculating (HxWxD): 150-150 x 600 x 482 mm
- Energy Efficiency Class: D (at a range of energy efficiency classes from A++ to E)\*
- Blower Efficiency Class: E\*
- Lighting Efficiency Class: E\*
- Grease Filtering Efficiency Class: C\*
- Average Energy Consumption: 93.3 kWh/year\*


**Serie | 4, Built-under cooker hood, 60 cm,  
Stainless steel  
DUL63CC50B**

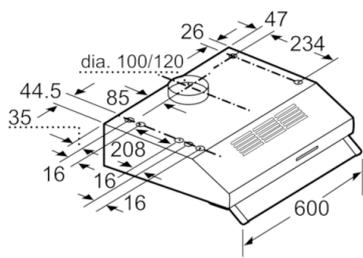

measurements in mm

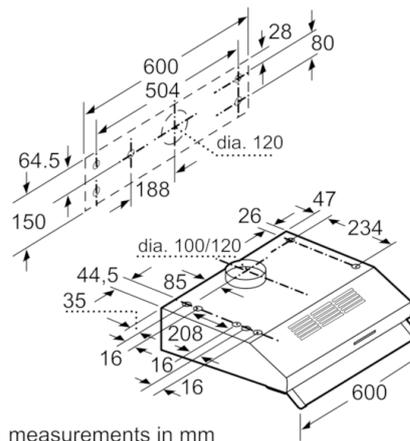

measurements in mm

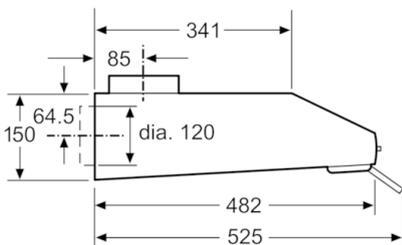

measurements in mm