

## Series 8, Downdraft hood, 80 cm, clear glass DDW88MM60B



A

DSZ1WW1B6 Clean Air Plus odor filter (replacement), DSZ1WW1I6 Clean Air Plus recirculation kit, DSZ1WW1J1 Long Life recirculation kit, DSZ1WW1M1 Installation kit remote motor, DSZ8WW1Y2 Mounting kit for seamless installation, DZZ1WW1X1 Flat duct adapt.round 90° DN150 Metal, DZZ1XX1X1 Aluflex pipe cyl. 150, HEZ9VDSB1 90° flat duct bend horizontal, HEZ9VDSB2 90° flat duct L vertical, HEZ9VDSI0 Adapter round-flat, HEZ9VDSI1 90° Adapter round-flat, HEZ9VDSM1 Straight tube 500mm, HEZ9VDSM2 Straight tube 1000mm, HEZ9VDSS1 Connector sleeve (female)



- **Seamless Design:** perfect design fit of ventilation module and cooktop.
- **Guided Air:** perfect extraction performance regardless of pot height and pot position.
- **Hob-based hood control:** convenient control of Glass Draft Module functions via the hob.
- **PerfectAir sensor:** automatic control of settings for maximal extractor performance with minimal noise.
- **Silent:** maximum extractor performance with minimal noise.

Typology: ..... Downdraft  
Length electrical supply cord: ..... 130.0 cm  
Min. required niche size for installation (HxWxD): 703mm x 781.0mm x 123mm mm  
Net weight: ..... 35.5 kg  
Type of control: ..... Electronic  
Number of speed settings: ..... 3-stage + 2 intensive  
Max. air extraction: ..... 501 m³/h  
Boost position output recirculating: ..... 525 m³/h  
Max. air recirculation: ..... 416 m³/h  
Boost position air extraction: ..... 775 m³/h  
Maximum Air flow: ..... 501 m³/h  
Noise level: ..... 62 dB(A) re 1pW  
Diameter of air outlet: ..... 150 mm  
Grease filter material: ..... Washable stainless steel  
EAN code: ..... 4242005450688  
Connection rating: ..... 300 W  
Fuse protection: ..... 10 A  
Voltage: ..... 220-240 V  
Frequency: ..... 50; 60 Hz  
Plug type: ..... GB plug  
Installation typology: ..... Built-in  
Delay Shut off modes: ..... 10 min



4 242005 450688

**Series 8, Downdraft hood, 80 cm,  
clear glass  
DDW88MM60B**

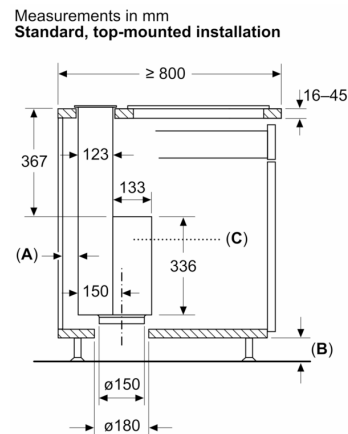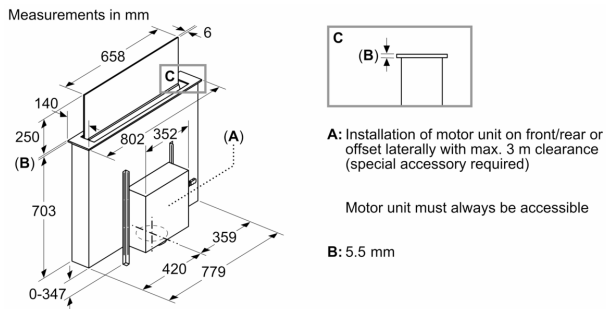

Standard: with worktop divider between  
downdraft and hob


**A:**  $\geq 20$  mm between the Guided Air suction area and a cabinet wall

**B:**  $\geq 60$  mm for air recirculation

≥ 100 mm for air extraction with ducting  
in the plinth

**C:** Motor unit must always be accessible

Measurements in mm  
**Seamless, top-mounted installation**  
**(Special accessory required)**

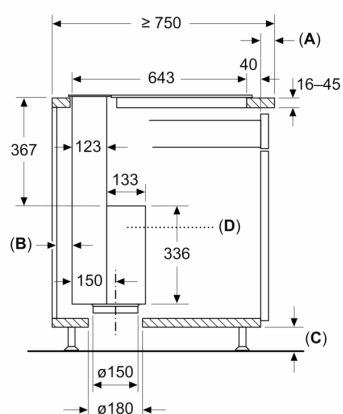

**A:** Worktop overlap to kitchen cabinet


**B:**  $\geq 20$  mm between the Guided Air suction area and a cabinet wall

**C:**  $\geq 60$  mm for air recirculation

≥ 100 mm for air extraction with ducting  
in the plinth

**D:** Motor unit must always be accessible

Measurements in mm  
**Combination with electric hob**  
**Seamless, top-mounted installation**




**A:** Worktop overlap to kitchen cabinet

Combination with gas hob is not possible

To prevent power loss, observe the following:


- Do not install upper cabinets or open shelf elements above the appliance
- Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
- Distance between appliance frame and wall min. 50 mm

Measurements in mm  
**Combination with electric hob**  
**Standard, top-mounted installation**




- Standard: with worktop divider between downdraft and hob
- Combination with gas hob is not possible
- To prevent power loss, observe the following:
- Do not install upper cabinets or open shelf elements above the appliance
  - Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm
  - Distance between appliance frame and wall min. 50 mm

**Planning recommendation, air recirculation**



**A:** Exterior wall – U-value  $\leq 0.5 \text{ W/(m}^2\text{K)}$


Standard installation: Partially laid around the toe kick



**B:** Exterior wall – U-value  $> 0.5 \text{ W/(m}^2\text{K)}$


Installation with fully laid pipework to the toe kick for poorly insulated exterior walls or above cold floors

Measurements in mm  
**Combination with electric hob**  
**Seamless, top-mounted installation**




- A:** Worktop overlap to kitchen cabinet
- Combination with gas hob is not possible
- To prevent power loss, observe the following:
- Do not install upper cabinets or open shelf elements above the appliance
  - Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm

Measurements in mm  
**Combination with electric hob**  
**Standard, top-mounted installation**



- Standard: with worktop divider between downdraft and hob
- Combination with gas hob is not possible
- To prevent power loss, observe the following:
- Do not install upper cabinets or open shelf elements above the appliance
  - Left/right distance between appliance and wall/adjacent upper cabinet min. 500 mm

Measurements in mm  
**Standard, top-mounted installation**

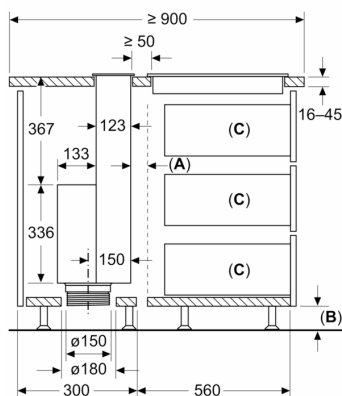


Standard: with worktop divider between downdraft and hob

- A:** Ventilation gap for hob
- B:**  $\geq 60 \text{ mm}$  for air recirculation  
 $\geq 100 \text{ mm}$  for air extraction with ducting in the plinth
- C:** Max. pull-out depth
- Motor unit must always be accessible

Measurements in mm  
**Seamless, top-mounted installation**

**(Special accessory required)**

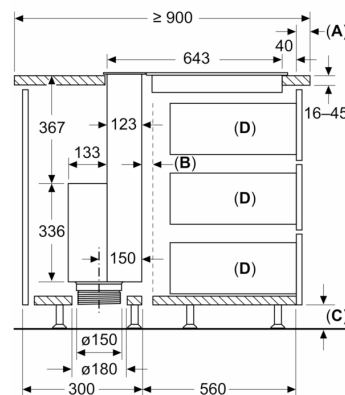

- A:** Worktop overlap to kitchen cabinet
- B:** Ventilation gap for hob
- C:**  $\geq 60 \text{ mm}$  for air recirculation  
 $\geq 100 \text{ mm}$  for air extraction with ducting in the plinth
- D:** Max. pull-out depth
- Motor unit must always be accessible