

**Serie | 4, wall-mounted cooker hood,  
90 cm, Stainless steel  
DWB96DM50B**



**Optional accessories**

DHZ1225 : Chimney extension 1000 mm  
 DHZ1235 : Chimney extension 1500 mm  
 DHZ9550 : Brushed steel back panel  
 DHZ9551 : Brushed steel back panel  
 DSZ5201 : CleanAir active carbon filter spare part  
 DSZ6200 : CleanAir Recirculation Kit  
 DWZ0DX0A0 : Active carbon filter  
 DWZ0DX0U0 : Recirculating kit  
 DWZ0XX0I0 : Integrated CleanAir Recirculation Kit  
 DWZ0XX0J0 : Integrated CleanAir Recirculation Kit  
 DZZ0XX0P0 : CleanAir act.carbon filter regenerative

**Box design hood: performance and  
matching kitchen design complete in one  
hood.**

- **TouchSelect control:** quick touch-control selection of desired settings and light.
- An impressive extraction rate of 604 m<sup>3</sup>/h ensures this hood will have your kitchen odour free in no time.
- **Silent:** maximum extractor performance with little noise

**Technical Data**

|                                                           |                    |
|-----------------------------------------------------------|--------------------|
| Color chimney :                                           | Stainless steel    |
| Typology :                                                | Chimney            |
| Approval certificates :                                   | CE, VDE            |
| Length electrical supply cord (cm) :                      | 130                |
| Height of the chimney (mm) :                              | 583-912/583-1022   |
| Height of product, without chimney (mm) :                 | 53                 |
| Minimum distance above an electric hob :                  | 550                |
| Minimum distance above a gas hob :                        | 650                |
| Net weight (kg) :                                         | 12.327             |
| Type of control :                                         | Electronic         |
| Maximum output air extraction (m <sup>3</sup> /h) :       | 372                |
| Boost position output recirculating (m <sup>3</sup> /h) : | 360                |
| Maximum output recirculating air (m <sup>3</sup> /h) :    | 290                |
| Boost position air extraction (m <sup>3</sup> /h) :       | 604                |
| Number of lights :                                        | 2                  |
| Noise level (dB(A) re 1 pW) :                             | 60                 |
| Diameter of air outlet (mm) :                             | 120 / 150          |
| Grease filter material :                                  | Washable aluminium |
| EAN code :                                                | 4242005051120      |
| Connection Rating (W) :                                   | 220                |
| Current (A) :                                             | 10                 |
| Voltage (V) :                                             | 220-240            |
| Frequency (Hz) :                                          | 50; 60             |
| Plug type :                                               | GB plug            |
| Installation typology :                                   | Wall-mounted       |



## Serie | 4, wall-mounted cooker hood, 90 cm, Stainless steel DWB96DM50B

### Box design hood: performance and matching kitchen design complete in one hood.

#### Key performance features:

- Energy Efficiency Class: B (at a range of energy efficiency classes from A++ to E)\*
- Maximum extraction rate exhaust air 372 m<sup>3</sup>/h according to EN 61591
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 372 m<sup>3</sup>/h  
Intensive 604 m<sup>3</sup>/h
- Noise max. Normal Level: 60 dB\*

#### Features

- TouchControl with Electronic display
- Electronic display
- 3 power levels & intensive setting
- 2 x 1.5W LED light
- Colour Temperature: 3500 K
- Automatic intensive revert (6mins)
- 3 metal grease filter cassettes
- Designed for wall mounted installation

#### Design

- Brushed steel
- Box design
- Chimney extractor hood
- TouchControl
- Electronic control

#### Performance/technical information


- Suitable for ducted or recirculating operation
- For recirculated extraction recirculating kit or CleanAir recirculating kit (accessory) needed
- Max. extraction rate: 604 m<sup>3</sup>/h
- Extraction rate according to EN 61591 ø 15 cm:  
max. Normal use 372 m<sup>3</sup>/h  
Intensive 604 m<sup>3</sup>/h
- Extraction rate in recirculation mode:  
Max. normal use: 290 m<sup>3</sup>/h  
Intensive: 360 m<sup>3</sup>/h
- Noise max. Normal Level: 60 dB\*
- Noise level according to EN 60704-3 and EN 60704-2-13 exhaust air:  
Max. normal use: 60 dB(A) re 1 pW (47 dB(A) re 20 µPa sound pressure)  
Intensive: 70 dB(A) re 1 pW (57 dB(A) re 20 µPa sound pressure)
- Noise levels in recirculation mode:  
Max. normal use: 71 dB(A) re 1 pW (58 dB(A) re 20 µPa sound pressure)  
Intensive: 75 dB(A) re 1 pW (62 dB(A) re 20 µPa sound pressure)
- 
- Light Intensity: 214 lux
- Colour Temperature: 3500 K
- Electrical cable length 1.3 m
- Diameter pipe Ø 150 mm (Ø 120 mm enclosed)
- Dimensions exhaust air (HxWxD): 635-965 x 900 x 500 mm
- Dimensions recirculating (HxWxD): 635-1075 x 900 x 500 mm
- Dimensions recirculating with CleanAir module (HxWxD):  
703 x 900 x 500 mm - mounting with outer chimney  
833-1163 x 900 x 500 mm - mounting with telescopic chimney
- Energy Efficiency Class: B (at a range of energy efficiency classes from A++ to E)\*
- Blower Efficiency Class: A\*
- Lighting Efficiency Class: A\*
- Grease Filtering Efficiency Class: C\*
- Average Energy Consumption: 48.5 kWh/year\*

#### Optional accessories


- Recirculating kit

\* In accordance with the EU-Regulation No 65/2014

## Serie | 4, wall-mounted cooker hood, 90 cm, Stainless steel DWB96DM50B

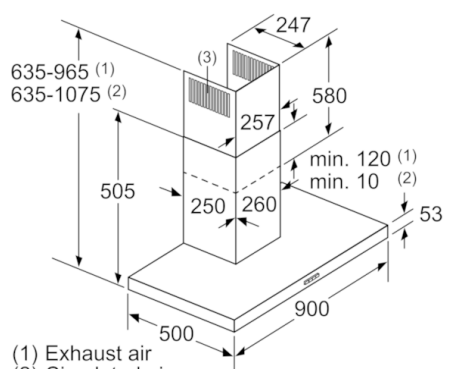


- (1) Exhaust air  
(2) Circulated air  
(3) Air outlet – slots for exhaust air to be mounted facing down
- measurements in mm

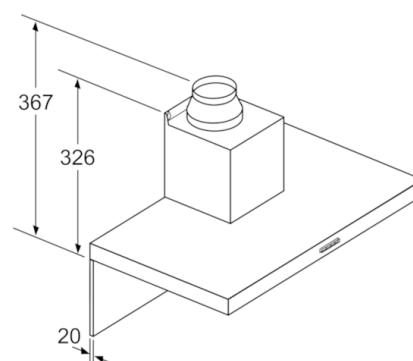


If a back panel is used, the design of the appliance must be considered.

measurements in mm

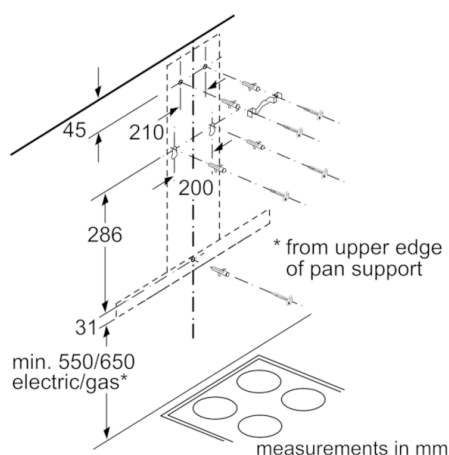

min. 550/650 electric/gas\*

measurements in mm

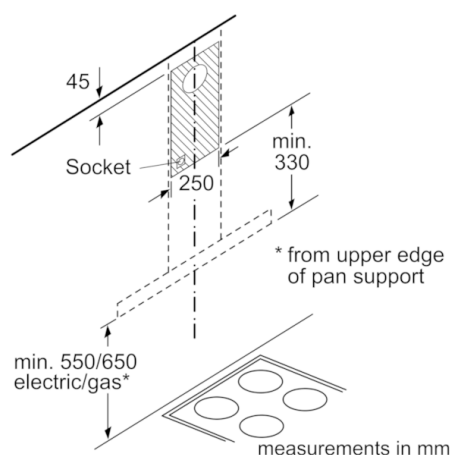

min. 550/650 electric/gas\*

measurements in mm